


Fact Sheet

vcsecurity
by VisiConsult

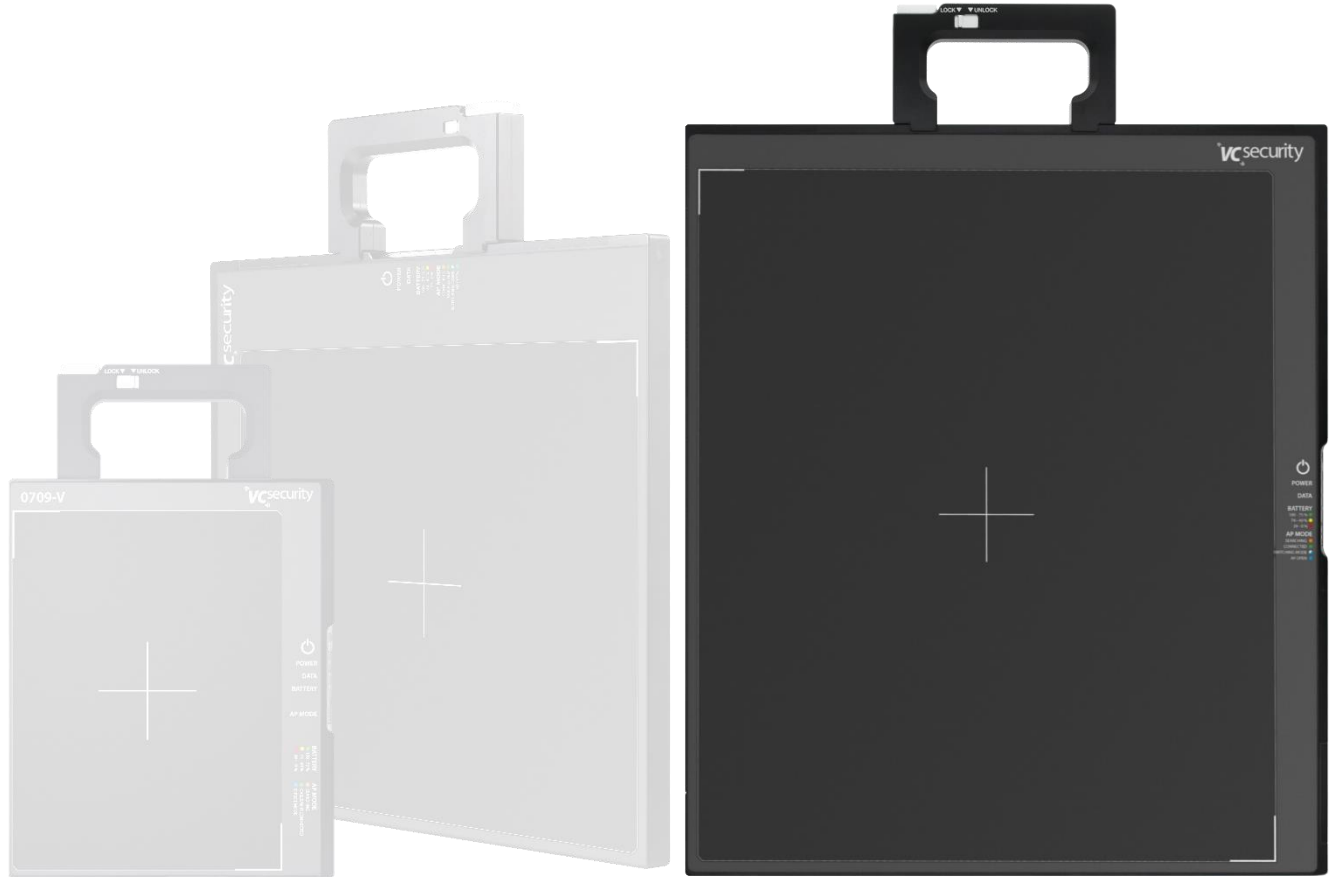


Detector 1417-V

EN - Edition 02

1417-V

The flat panel detector 01417-V offers a large imaging area and a high resolution, which enables excellent image quality. Maximum portability results from its light weight and detachable handles for two sides. Thanks to its high sensitivity, this detector proves to be a versatile element in VCsecurity systems. The simple switch between wired and wireless mode enables quick and easy work. In addition, the 1417-V impresses with its enormous weather resistance for outdoor use.

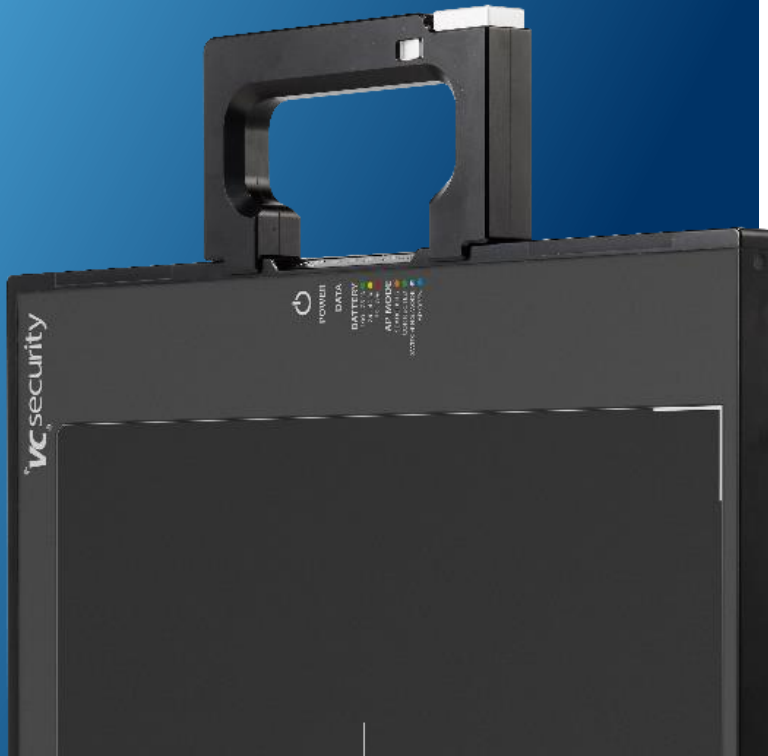

VCsecurity
by VisiConsult

| | |
|----------------------------------|--|
| Pixel Matrix | 2560 x 3072 pixels |
| Pixel Pitch | 140 µm |
| Resolution | 3.5 lp/mm |
| Size | 400 x 470 x 17 mm |
| Imaging Area | 358 x 430 mm |
| Weight | 4.2 kg |
| Dead Space | 8 mm bottom, 10 mm side |
| Sensor with Grayscale | TFT with photodiode 16 bits |
| Trigger | Software / AED function or manual |
| Ingress Protection | Water resistant and dustproof (IP67) |
| Environment | - 20°C – +50°C |
| Drop tested | Up to 1 m height |
| Operating time | Up to 8 hours with constant image acquisition |
| Battery | Hot swappable, external two bay charger |
| Other | Removable handle, adjustable on two sides of the panel |

All images, descriptions and technical specifications are subject to change without prior notice.